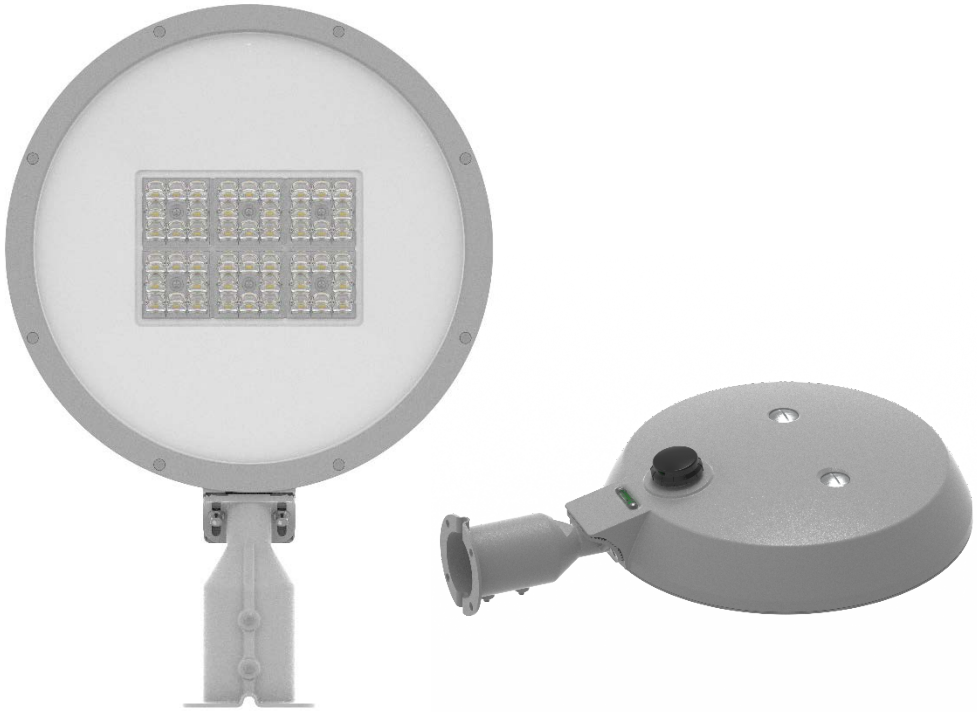


SWL-JD

Product Features

- 60W (Max), 4-step DIP switch power selection: 15W / 30W / 50W / 60W
- ADC12 aluminium die-cast housing, UV-resistant outdoor powder coating, excellent heat dissipation ;
- Curved smooth-back design, easy to clean and maintain ;
- Multiple beam angle options: T1 / T2 / T3 / T4 / T5 (optional)
- 3-step DIP switch CCT selection: 3000K / 4000K / 5000K ;
- Dimming: ON/OFF, 0/1–10V, DALI ;
- Compatible with ZHAGA Book 18 interface (top-mount or bottom-mount)
- Side / Top / Wall mount, ±15° tilt adjustment; pipe diameter Ø42 / Ø48 / Ø60 mm ;
- IP65/IK08 ;
- CE & RoHS compliant
- 5-Year Warranty

Applications:

Public lighting for urban and residential streets, bicycle and sidewalks, train stations and subways, parking lots, parks, courtyards, squares and pedestrian areas.

www.sensetechlight.com


No 6, Shengxing Street, ChangAn Town,
DongGuan City, GuangDong Province, China

Version: A1—202603

CE RoHS


Model No.	SWL-JD60W
Input Power	Max 60W (4-step DIP switch power selection: 15W / 30W / 50W / 60W)
Input Voltage （V）	AC220-240V
Input Frequency	50/60Hz
Input Current （A）	0.39A @230Vac
PF	⩾0.9@230Vac
Driver Type	Isolated/Non-Isolated Driver
SPD	L-N 6KV, L/N-PE 6KV
THD	⩽15%
Odd harmonic limit	IEC 61000-3-2 Class C
LED Typ	SMD3030
Beam Angle	T1/T2/T3/T4/T5
CCT	Dip switch adjustmen ：3000K/4000K/5000K
CRI	⩾70
SDCM	⩽5
IK Rate	IK08
IP Rate	IP65
Luminous Efficacy	150Lm/W
N.W (kg)	2.3Kg
G.W (kg)	14.8Kg/5PCS
Product Dimension	L503*W350*H85
Package dimension/Pcs	L705*W415*H460/5PCS

Product Dimension

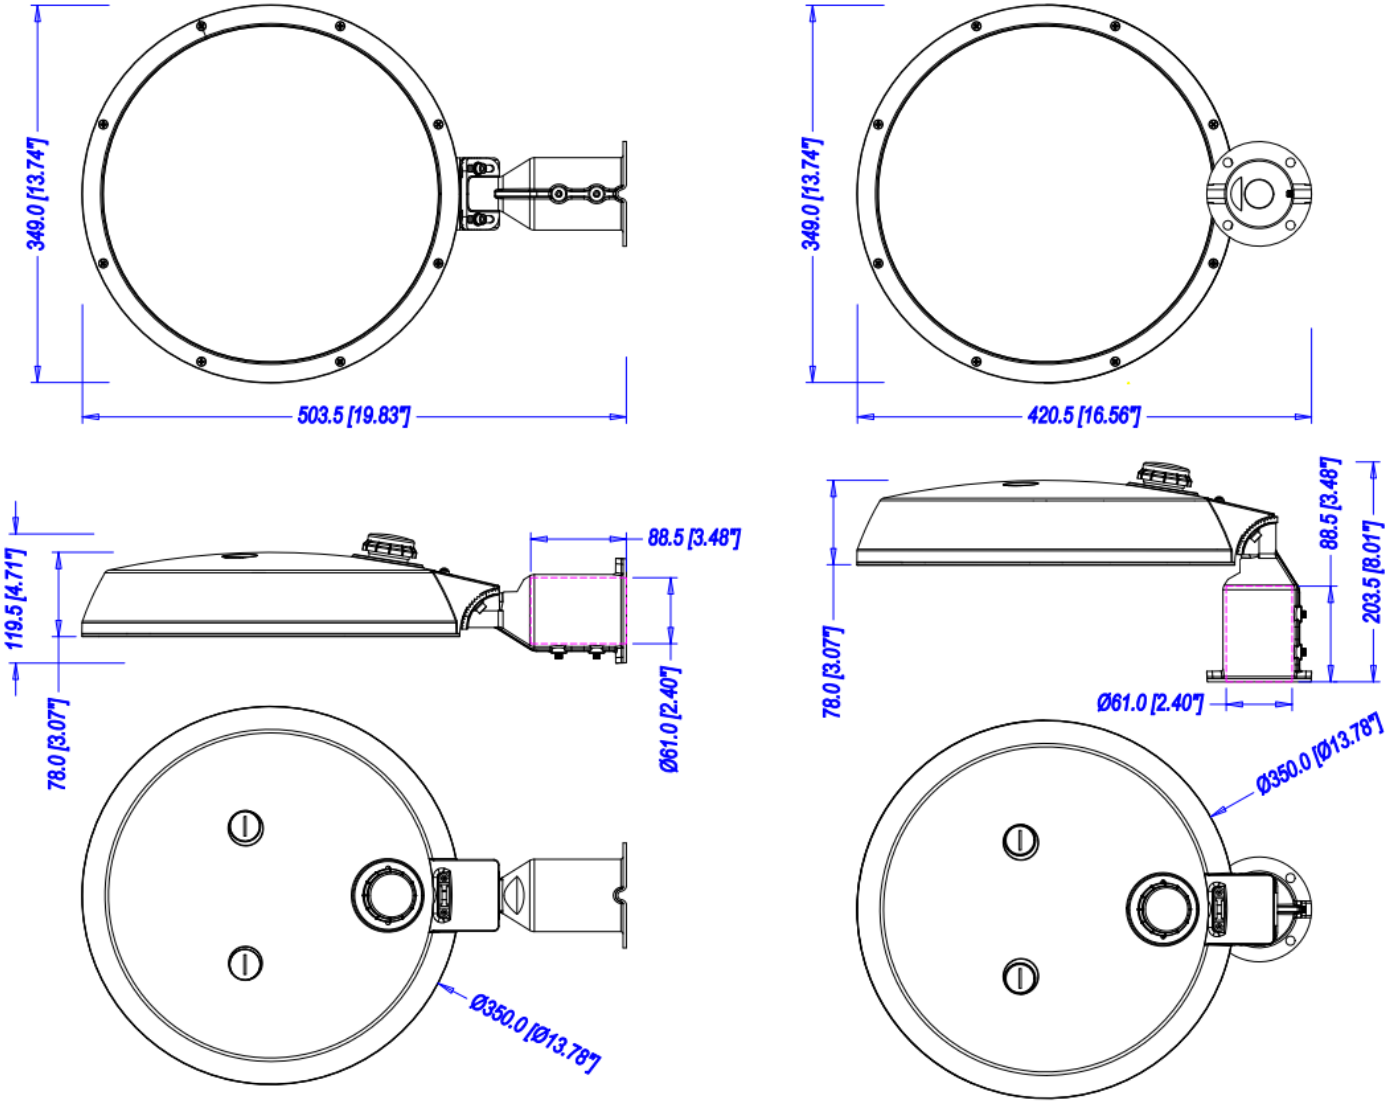


60W


Product light distribution




T1S

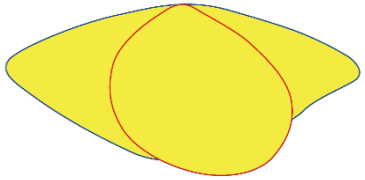


T2S/T2M

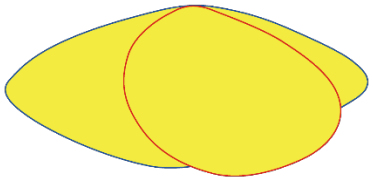

T3S/T3M

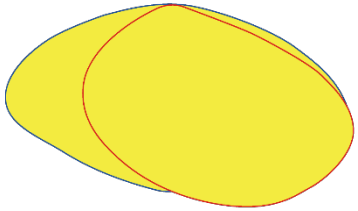

T4

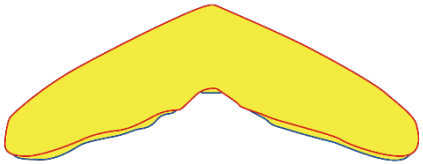

T5