

SWS-T6

Product Description

- 20W/30W/40W/60W/100W
- 6063 Aluminum heat dissipation material, stable and reliable heat dissipation
- Compatible with ceiling, cable installation, boom and other installation methods
- IP65/IK07。
- Warranty：5 years
- Optical glass design: 70°/100°, to meet the tunnel (light belt lighting). Warehouse, shelves, industrial lighting and stadium lighting.
- Nordic simple design style, smooth design, no dust troubles

Application:
Tunnel, warehouse, shelves, industrial lighting, sports lighting.

www.sensetechlight.com

NO.6 Sheng Xing Street Wu Sha Community,Chang AnTown,

Dongguan City,Guang dong Province,P.R.China


CCC CE RoHS

LED LINEAR HIGH BAY LIGHT

SWS-T6


Product model	SWS-T6-20W	SWS-T6-30W	SWS-T6-40W	SWS-T6-60W	SWS-T6-100W
Input power(w)	20W	30W	40W	60W	100W
Input voltage(V)	100~277Vac or 200~ 240Vac				
Input frequency	50/60Hz				
Input current (A)	0.16A@ 120Vac, 0.09A@230Vac	0.25A@ 120Vac, 0.13A@230Vac	0.34A@ 120Vac, 0.17A@230Vac	0.5A@ 120Vac, 0.26A@230Vac	0.83A@ 120Vac, 0.44A@230Vac
PF	PF>0.95				
Driver type	Lumileds/Meanwell/Sosen/ inventronics /MOSO				
Driver surge protection	L-N 4KV, L/N-PE 6KV ; L-N 6KV, L/N-PE 10KV				
Total harmonic	≤25%				
Odd harmonic limit	IEC 61000-3-2 Class C				
LED type	LUMILEDS SMD 2835R 9V				LUMILEDS SMD 3030 6V
Beam angle	70°/100°				
CCT	3000K/4000K/5000K/5700K				
CRI	⩾70				
SDCM	⩽7				
IK	IK07				
IP	IP65				
Luminaire efficiency	110Lm/W				
N.W(kg)	2.3	2.3	2.6	2.6	2.8
G.W(kg)	3.3	3.3	3.6	3.6	3.8
Product dimension	L998*W228*110mm				
Packing size/pcs	L1070*W200*H250mm/4 pcs				

Ceiling installation dimension

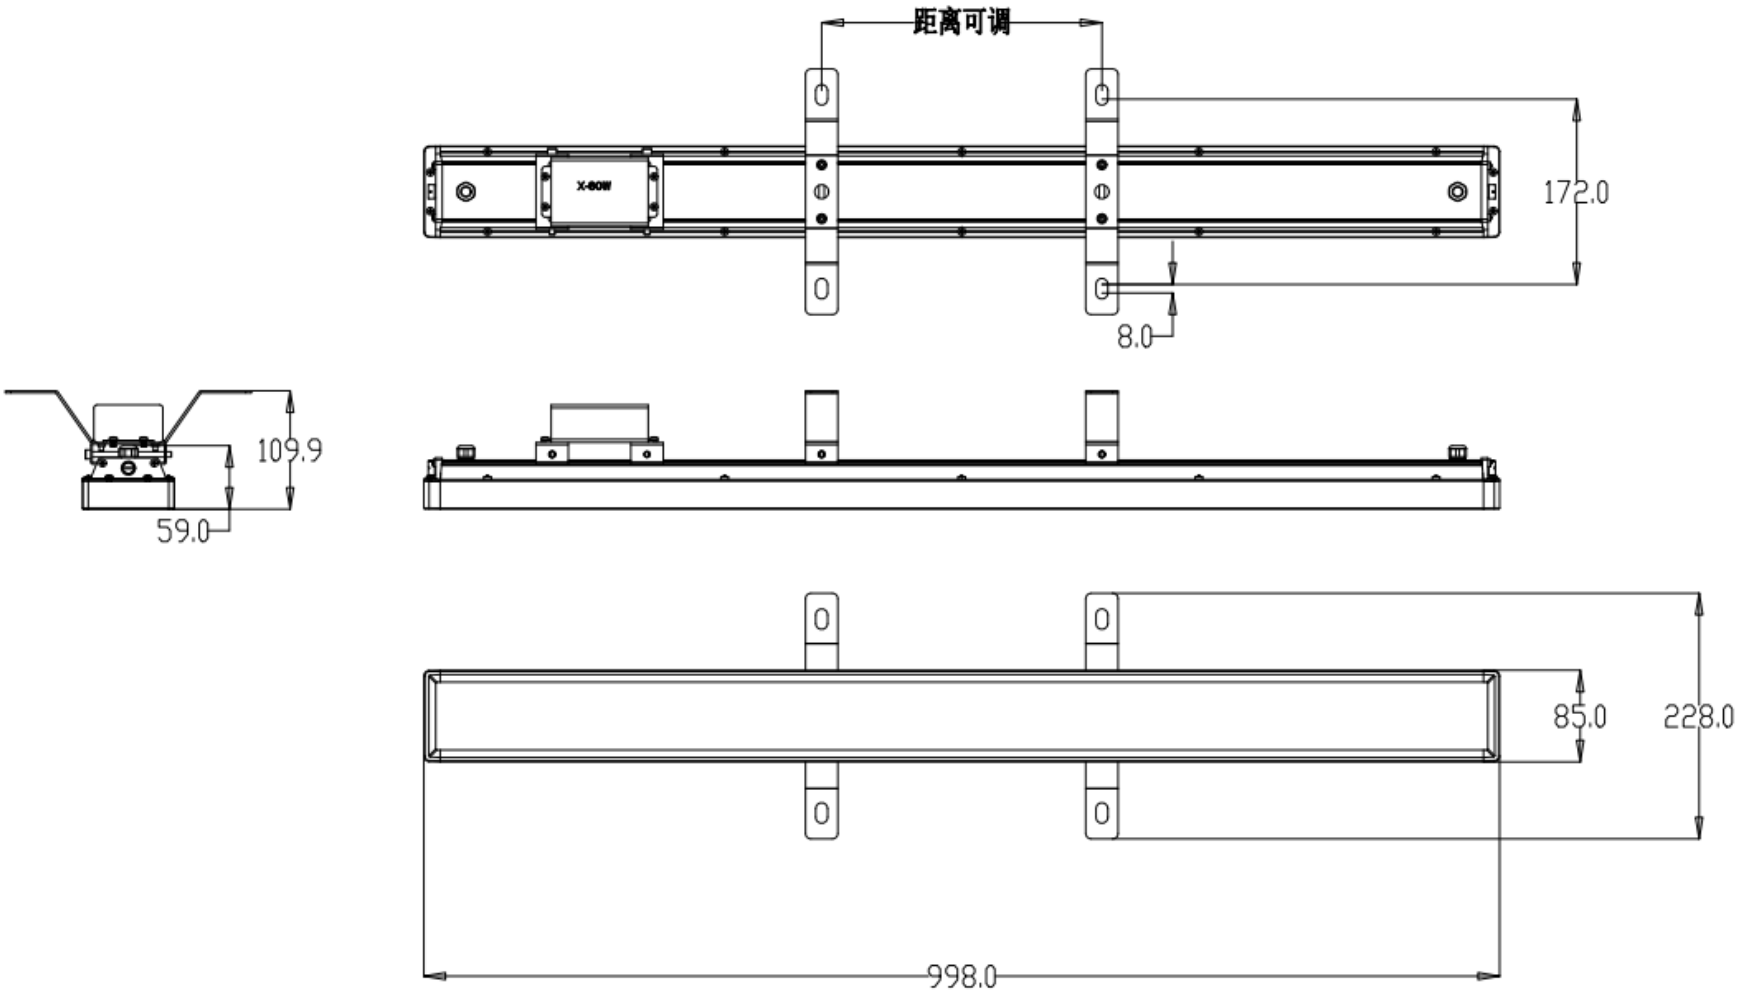


20W/30W/40W/60W/100W


Adjustable bracket installation type size

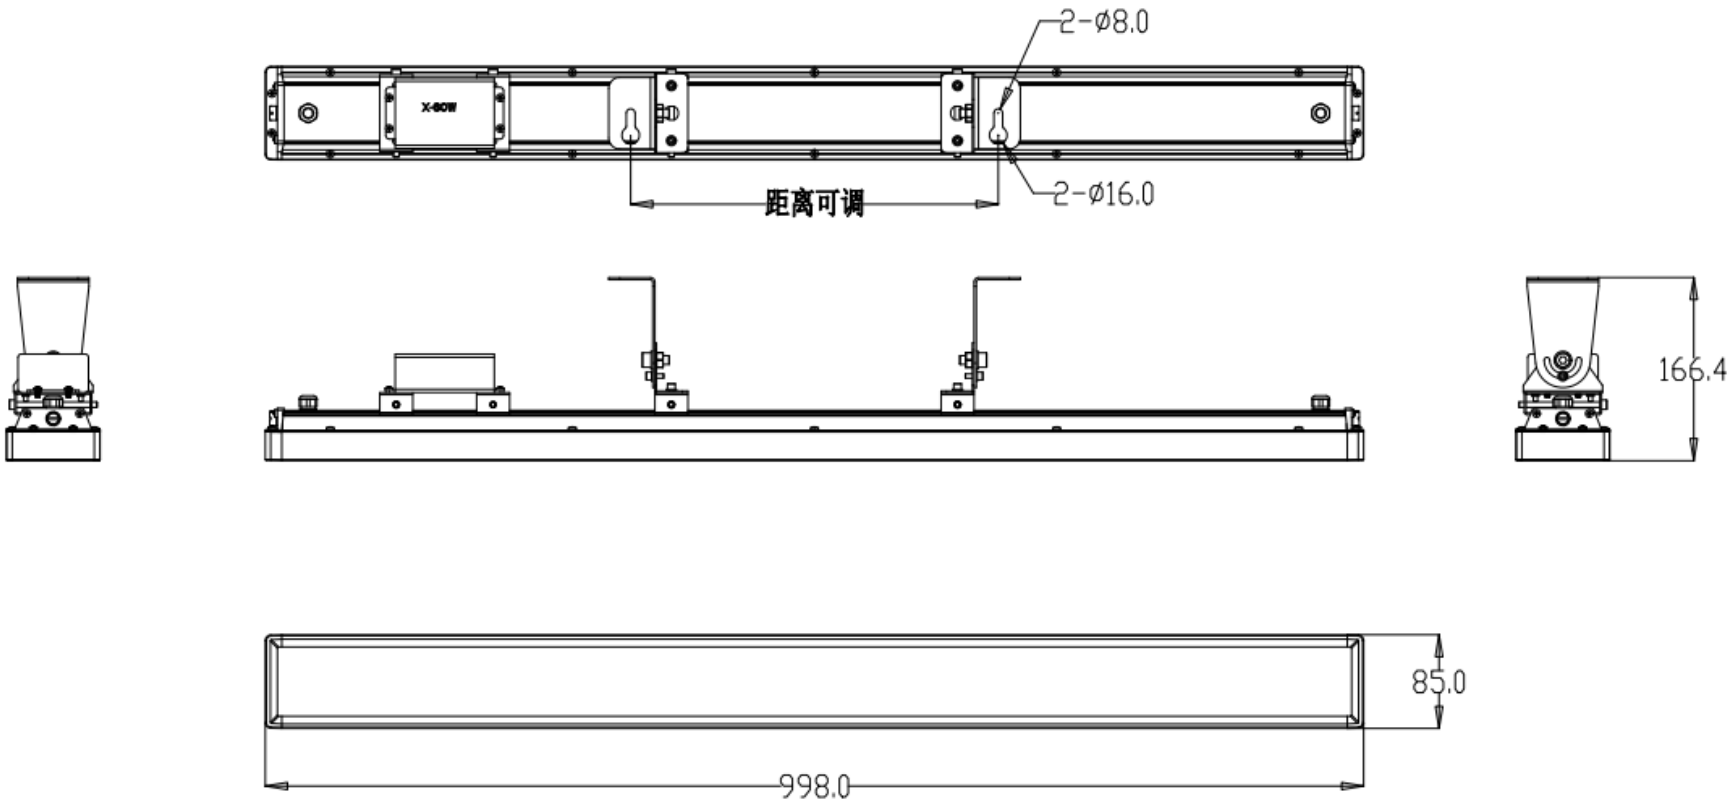



20W/30W/40W/60W/100W

Sling installation type size

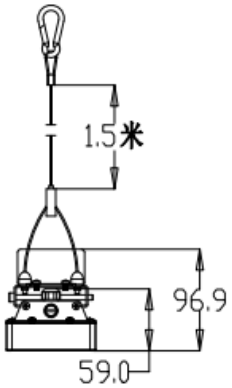



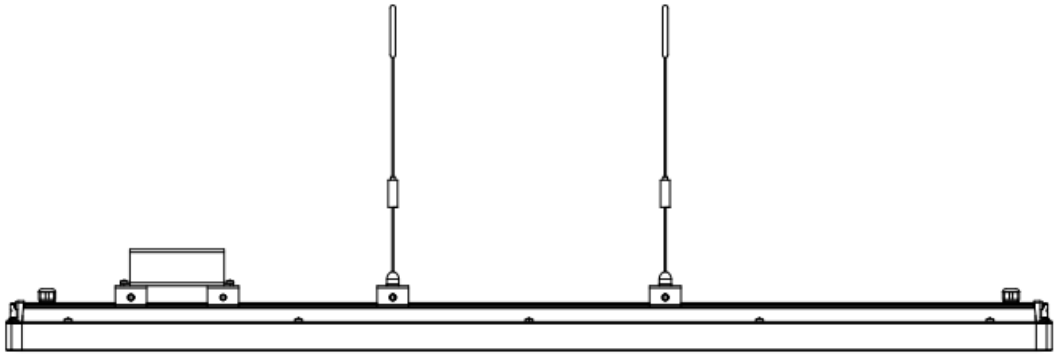

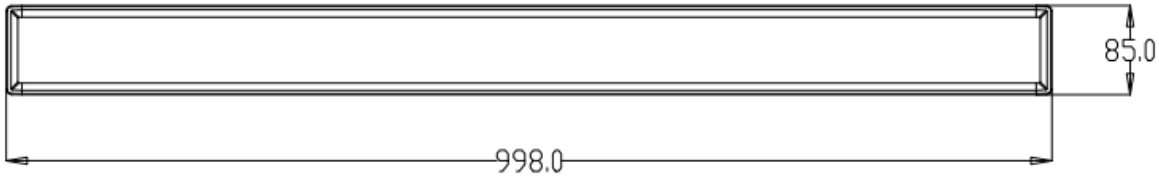

20W/30W/40W/60W/100W